

HARVIA CLUB

HRKG150400

The Harvia Club electric heater is a heavy duty heater with enough steam for a large group of users, from morning till night.



Features

Main material : Steel


H x W x D : 700.0 x 505.0 x 430.0 mm

Net weight (kg) : 25.0

Installation location : Floor

ID	GTIN	Output (kW)	Sauna room size min - max m3
HRKG150400	6410082607150	15 kW	14.0-24.0

Related products



SFE-500500



SASL2M


Spare parts

Product	ID	Pcs
Heating element 2500W/230V, F	ZSP-250	6
Adjustable leg	ZSA-440	4
Heating element 2500W 230V	SPZSP-250	6
Adjusting leg M10x60 x 4 pcs, floor mounted heaters	SPZSA-442	1


Technical details

Technical data	Type / attribute	HRKG150400
	Color	Stainless Steel
	Power output	15 kW
	Stone sizes	Ø5–10 cm
	Stone amount (kg)	60
Dimensions	Product width	505
	Product height	700
	Product depth (mm)	430
	Net weight (kg)	25
	Gross weight	21.7
	Package width	445
	Package height	735
	Package depth	510
Safety and installation dimensions	Safety distance front (non-combustible materials)	50
	Safety distance front (combustible materials)	50
	Safety distance side (non-combustible materials)	50
	safety distance to the side wall (combustible materials)	50
	Safety distance behind (non-combustible materials)	100
	Safety distance (Ceiling)	1400
	Room min. height(depends on connections and therefore from output, star/delta)	2100
	Installation opening height	2100
	Installation opening width	655
	Installation opening depth	530

Technical images

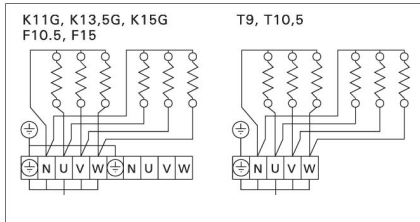


The heater's electrical connections

The heater's electrical connections
in two groups

Heater Ofen	Output Leistung	Saunaroom Saunakabine		Min. distances Min. abstand des Ofen							Cables Kabel			Fuse Sicherung
		Cubic vol. Rauminhalt	Height Höhe	A min.	A max.	B min.	C min.	D min.	E max.	To control zum Steuergerät	To sensor zum Fühler	Connecting cable to heater Anschlußkabel zum Ofen	400 V 3N ~	
		See item 2.3. Siehe Kap. 2.3.		See fig. 3. Siehe Abb. 3.							MLMK/ MMJ	SSJ	H07RN-F	
	kW	min m ³	max m ³	min mm	mm	mm	mm	mm	mm	mm	mm ²	mm ²	mm ²	A
K11G	11,0	9	16	1900	70	170	50	70	1200	700	5 x 2,5	4 x 0,25	5 x 2,5	3 x 16 A
K13.5G	13,5	11	20	2100	100	200	50	100	1400	700	5 x 4,0	4 x 0,25	5 x 2,5	3 x 20 A
K15G	15,0	14	24	2100	100	200	50	100	1400	700	5 x 6,0	4 x 0,25	5 x 2,5	3 x 25 A
T9	9,0	8	14	1900	120	150	50	80	1250	650	5 x 2,5	4 x 0,25	5 x 2,5	3 x 16 A
T10.5	10,5	9	15	1900	150	180	50	100	1250	650	5 x 2,5	4 x 0,25	5 x 2,5	3 x 16 A
F10.5	10,5	9	18	2100	100	200	30	50	1400	700	5 x 2,5	4 x 0,25	5 x 2,5	3 x 16 A
F15	15	14	26	2100	150	250	30	100	1400	700	5 x 6,0	4 x 0,25	5 x 2,5	3 x 25 A
F16.5	16,5	16	30	2100	150	250	30	100	1400	700	5 x 6,0	4 x 0,25	2x 5 x 2,5	3 x 25 A
F18	18	20	35	2100	150	250	30	100	1400	700	5 x 10,0	4 x 0,25	2x 5 x 2,5	3 x 35 A



Model and dimensions Modell und Maße	Width Breite	Depth Tiefe	Height Höhe	Weight Gewicht	Stones max Steine max
K11G-K15G	505 mm	430 mm	700 mm	25 kg	60 kg
T9-T10.5	465 mm	345 mm	660 mm	25 kg	40 kg
F10.5-18	500 mm	500 mm	700 mm	26 kg	60 kg

Installation details

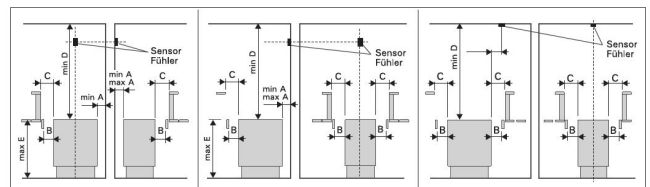

The heater's safety distances. Note! If E is higher than E max, then B min. = C min.

HEATER OFEN	HEATING ELEMENT HEIZELEMENT	OUTPUT LEISTUNG	PART NO. TEIL NR.
T9	1, 2, 3, 4, 5, 6	1500 W/230 V	ZSS-110
T10.5	1, 3, 5 2, 4, 6	2000 W/230 V 1500 W/230 V	ZSS-120 ZSS-110



HEATER OFEN	HEATING ELEMENT HEIZELEMENT	OUTPUT LEISTUNG
K11G	1, 3, 5 2, 4, 6	2150 W/230 V 1500 W/230 V
K13.5G	1, 3, 5 2, 4, 6	2000 W/230 V 2500 W/230 V
K15G	1, 2, 3, 4, 5, 6	2500 W/230 V
F10.5	1, 3, 5 2, 4, 6	2000 W/230 V 1500 W/230 V
F15	1, 2, 3, 4, 5, 6	2500 W/230 V
F16.5	1, 3, 5 2, 4, 6	2500 W/230 V 3000 W/230 V
F18	1, 2, 3, 4, 5, 6	3000 W/230 V

We recommend to use only the manufacturer's spare parts.